



- 1 Remove outer layer of Video Cable

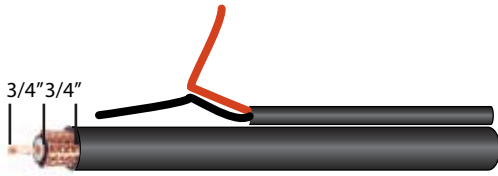

Make sure the copper wire braid does not touch the middle conductor


- 2 Twist connector until snug and remove outer layer of Power Cable on both ends

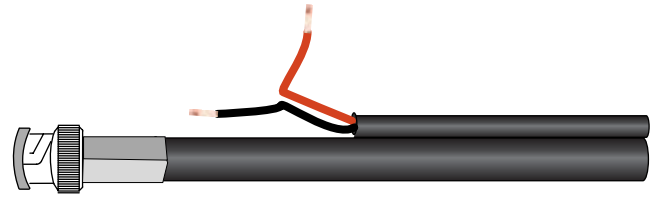

### Using a Power Pack

- 3 Connect power pack to MALE power pigtail.

Using wire nuts connect **RED** wire (positive) to the wire with the **WHITE STRIP** of the MALE Power Pigtail  
Connect **BLACK** wire (ground) to **BLACK** power wire

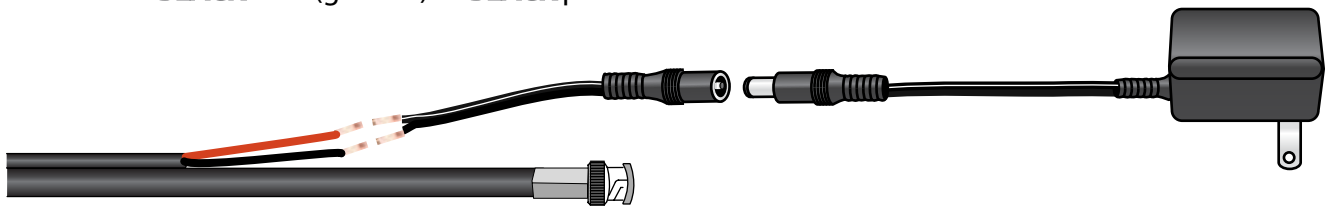

- 4 Using wire nuts connect the **RED** wire (positive) to the wire with the **WHITE STRIP** on the FEMALE Power Pigtail and connect **BLACK** wire (ground) to the **BLACK** power wire



### Using a Power Panel

- 3 Using wire nuts connect **RED** wire (positive) to the wire with the **WHITE STRIP** of the FEMALE Power Pigtail and connect **BLACK** wire (ground) to **BLACK** power wire.

Connect **RED** power wire to the **POSITIVE** screw terminal on the Power Panel and Connect the **BLACK** wire to the **NEGATIVE** terminal.

